PRODUCT SAFETY NOTICE

LAP Flood Light Range

Screwfix would like to make customers aware of the correct power supply cable which should be used for wiring this product, which the manufacturer had omitted from the instructions supplied with the product.

Only round 3 core cable, 6-10mm in diameter should be used. Use of flat, twin and earth type cable will render the product susceptible to water ingress, potentially causing a low risk of electrocution.

The products affected are:

Code	Product Description	Barcode
604CC	LAP LED FLOODLIGHT 10W BLACK DAYLIGHT	5052931961771
138CC	LAP LED FLOODLIGHT 20W BLACK DAYLIGHT	5052931961795
665CC	LAP LED FLOODLIGHT 30W BLACK DAYLIGHT	5052931961818
901CC	LAP LED FLOODLIGHT 50W BLACK DAYLIGHT	5052931962129
767CC	LAP LED PIR FLOODLIGHT BLACK 10W DAYLIGHT	5052931961788
122CC	LAP LED PIR FLOODLIGHT BLACK 20W DAYLIGHT	5052931961801
180CC	LAP LED PIR FLOODLIGHT BLACK 30W DAYLIGHT	5052931961825
458CC	LAP LED PIR FLOODLIGHT BLACK 50W DAYLIGHT	5052931962136

These products were offered for sale between 13/06/2018 and 10/12/2018.





To ensure that there is no risk of water ingress, please isolate the power supply and visually inspect the cable entering the back of the floodlight.

If the cable is round and has a 6-10mm outer diameter, no further action is required.

If the cable is flat, you need to ensure that appropriate measures have been taken to prevent water ingress or replace the cable with round 3 core cable, 6-10mm in diameter.


This is not a product recall so there is no need for you to return the product to us. If in doubt, please contact a qualified electrician.

If you have purchased any of these products for customers in the course of your own business, please contact them immediately and advise as above.


Thank you in advance for your co-operation in this matter and we apologise for any inconvenience caused.

Use round cable don't use flat cable

Wall mounted lights

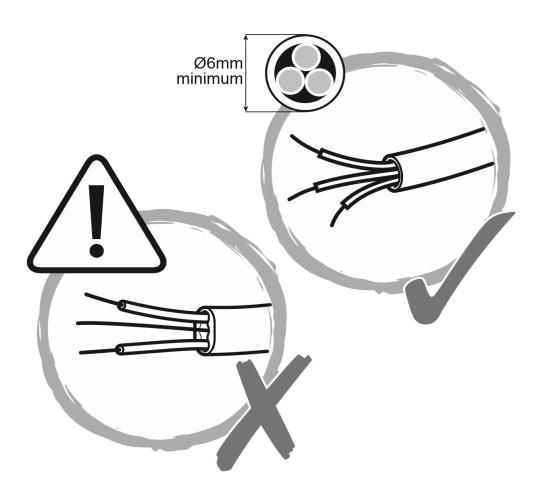

- The round mains cable should be at least 6mm in diameter.
- Ensure the connection is tightened, to create a good water seal.
- Read in combination with the manual.
- · Keep for future reference.

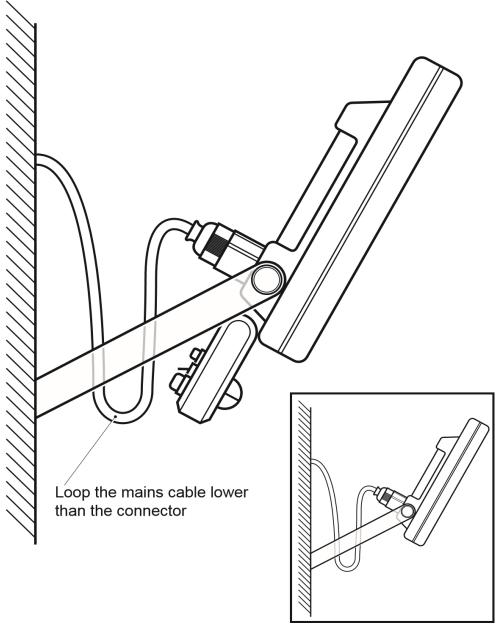

Kingfisher International Products Limited, 3 Sheldon Square, London, W2 6PX, United Kingdom www.kingfisher.com/products